

Desoutter




Industrial Tools



QUALITY CONTROL Measurement System

Optimize Tool Performance
Reduce Quality Cost
Full Data Traceability

More Than Productivity

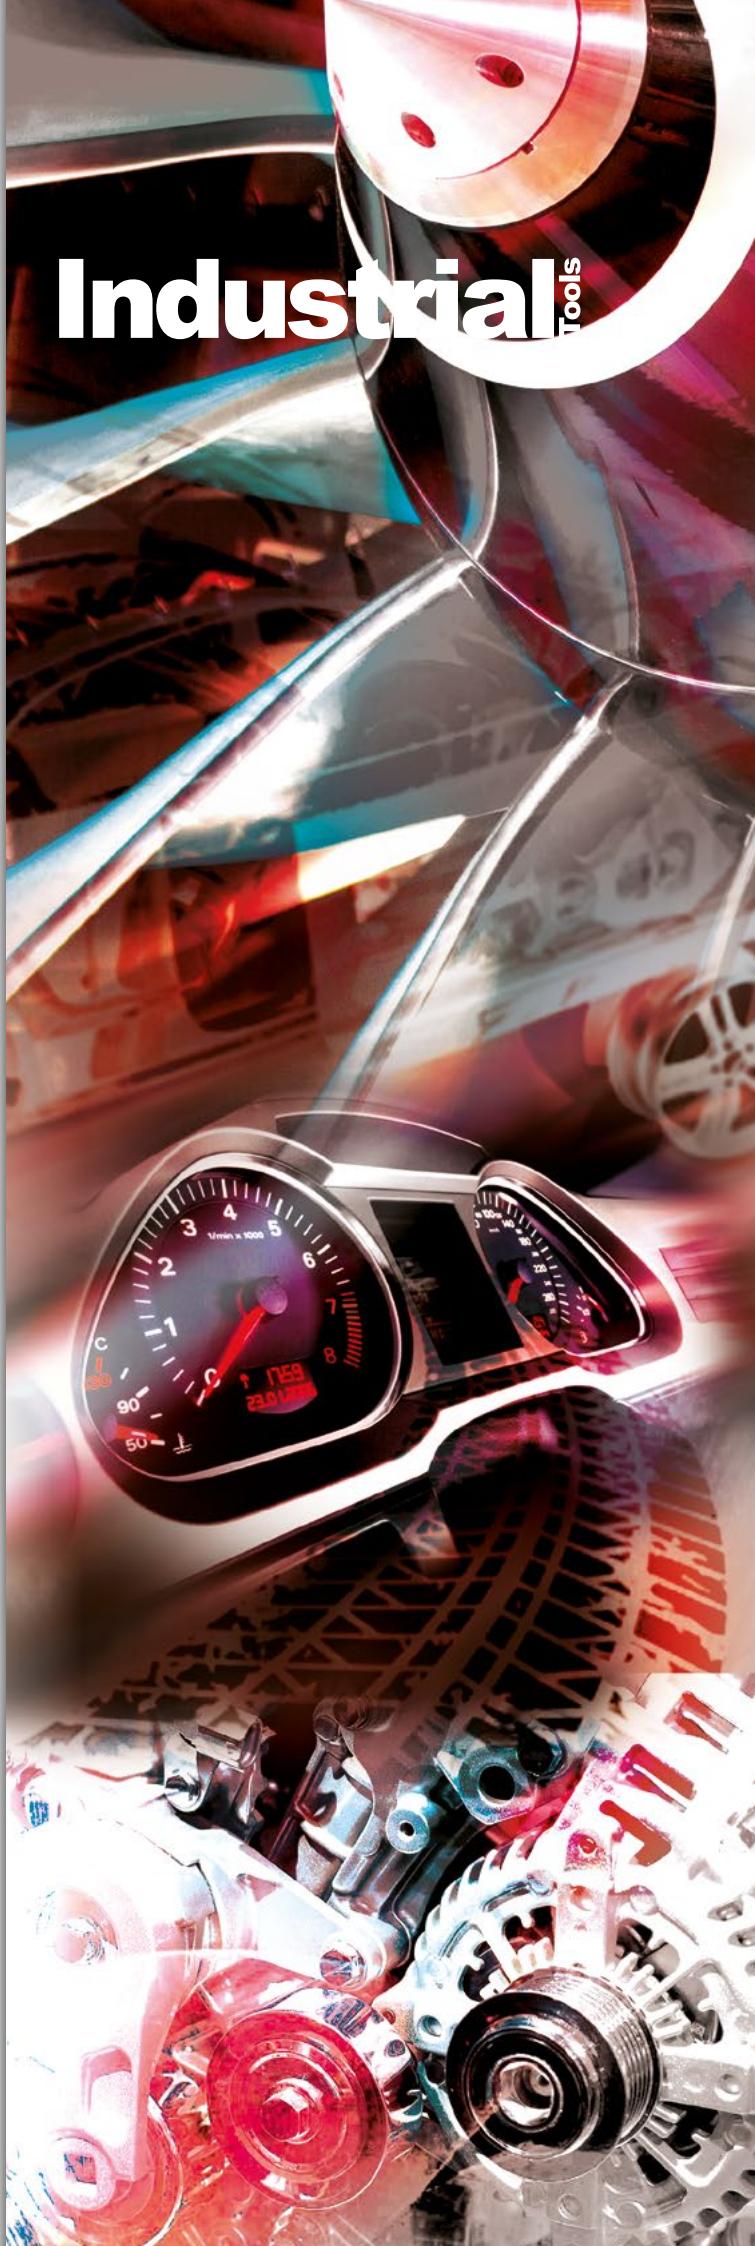



QUALITY ASSURANCE TECHNIQUES

Statistical quality assurance techniques help organizations to achieve over 30% defect reduction annually. They reflect a growing trend throughout the industry to become more quantitative about quality.

Activities to implement start from the qualification of your assembly tools in inventory, and the regular tests of their performance over their lifetime.

But over the simple measurement of Power Tools performances, Quality Assurance allows a continuous improvement of processes.

USING SIX SIGMA FOR PROCESS IMPROVEMENT (DMAIC)

- DEFINE: Set the goal
- MEASURE: Define the metrics
- ANALYZE: Measure where you go
- IMPROVE: Improve Processes while you go
- CONTROL: Act immediately if going on the wrong path

Measure and Analyze are the main added value of the range exposed in following pages.

Based on your Control Plan, the different solutions we provide in Measurement Techniques allow you to:

- ▶ Take control of the Capability and repeatability of Assembly tools from their reception in the factory, and make it sustainable and traceable with Machine Capability Tests and Calibration reports.
- ▶ Qualify the selected tools for specific operations in regards to the periodical tests performed.
- ▶ Measure in SPC the output of production and get clear guidance to implement preventive maintenance or detect a process deviation on critical operations.
- ▶ Enable documentation of your tightening operations from engineering phase to quality audits.

As a manufacturer of Industrial Tools, measurement systems, and service provider Desoutter is your partner to make your investment sustainable and cost effective.

DATA ANALYZER

This generation of Delta analyzer is the compact portable solution to monitor all types of production tools at just 500g. Combined with standard Desoutter DRT, PST, FCT or DST transducers it's capable of calibrating pulse tools, electric nutrunners or torque wrenches. Divided into three models for Torque measurement only (Delta 1D), Torque & Angle (Delta 6D) and capable of residual torque check and production strategy with Q-AUDIT (Delta 7D).

- Display Large color screen shows clear test results, Torque&Angle curves. Real time statistics, Tools description and Routes.



MAIN FUNCTION

| | Delta 1D | Delta 6D | Delta 7D |
|------------------------------------|--------------|--|---|
| Transducer | | | |
| Connection to DRT4, DRT5, DST | ✓ | ✓ | ✓ |
| Connection to CMD, GSE transducers | ✓ | ✓ | ✓ |
| Connection to Q-AUDIT | | | ✓ |
| On board functionality | | | |
| Wrench Test | ✓ | ✓ | ✓ |
| Nutrunner Test | ✓ | ✓ | ✓ |
| Pulse Tool Test | ✓ | ✓ | ✓ |
| Tools | 1 | 1000 | 1000 |
| PSet | | 1000 | 1000 |
| Integrated Statistic | Min, Max Avg | Cm, Cmk (ISO, NF and CNOMO standards) | Cm, Cmk (ISO, NF and CNOMO standards) + SPC |
| Angle | | ✓ | ✓ |
| Residual Check Strategy | | | ✓ |
| Production Strategy | | | ✓ |
| Results | 1000 | 5000 | 5000 |
| Curve | 10 | 10 | 10 |
| CVI autocalibration | | ✓ | ✓ |
| External Barcode connectivity | | ✓ | ✓ |
| Embedded Barcode | | | ✓ |



MAIN FUNCTION

- Connectivity

Ethernet and USB port for Delta QC software communication and RS232 for CVI II, CVIC II and CVI3 calibration or barcode reader.



- Transducer

Standard Desoutter connector for digital transducers.
Analog CMD and GSE transducers connection through an adapter.



- Power

Li-Ion high capacity battery of 16 hours of autonomy or external power supply.



- Barcode (Delta 7D)

Embedded Barcode for automatic Pset selection or VIN traceability

DELTA 1D

DELTA 1D is a torque measurement ideal for torque wrench or pulse tool test together with DRT or PST transducers. Delta 1D doesn't require any programming, it's ready to test the selected tool showing in real time Mins, Max and Average. Complete results and XLS reports are available to be exported from Delta QC Free version software.



DELTA 6D

DELTA 6D reads Angle from DRT transducer, ideal to test advanced electric nutrunner T&A strategies. DELTA 6D introduces Tool and PSet and definition with Route management, Statistic (ISO, CNOMO or NF standards), Curve and serial communication to CVI controller or Barcode. SPC analysis, curve overlay and off-line programming are available in combination with Delta QC Licensed version.

DELTA 7D


DELTA 7D combines all DELTA 6D features with DWTA wrench communication for Residual Torque check and production available with Torque plus Angle strategy. Thanks to the new joint analysis strategy the Delta 7D in combination with Q-AUDIT becomes the perfect measurement instrument to characterise the real joint in the line, a key feature to:

- find real joint yield point
- set the production tightening tool with the correct torque and angle values increasing the quality in the overall production process.




Q-AUDIT - WRENCH


PRODUCTION & QUALITY STRATEGIES: In combination with Delta 7D, the torque and angle wrench for residual automatic torque check and Joint analysis with Yield point detection.

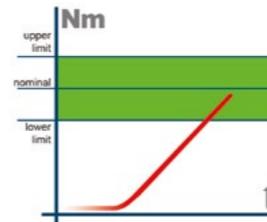


Tightening within torque limits

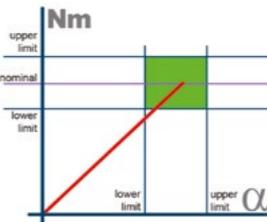

Tightening within torque and angle limits (tightening to a window)

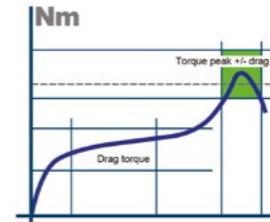

Pervailing torque automatic compensation

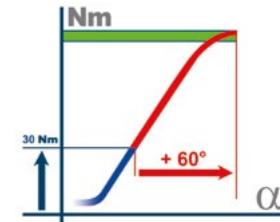

Tightening with torque and additional angle rotation (torque + angle)



All models are supplied with box including Battery, Power Supplier and Delta QC Free Version

ACCESSORIES INCLUDED

| ITEM | PART NUMBER |
|--------------------------|---------------|
| Delta Battery | 615 936 142 0 |
| Universal Power Supplier | 615 936 143 0 |

OPTIONAL ACCESSORIES

| ITEM | PART NUMBER |
|---------------------------------|---------------|
| Rubber Protection | 615 936 141 0 |
| Digital 10 pins Cable 2m | 615 917 430 0 |
| Digital 10 pins Spiral Cable 2m | 615 917 432 0 |
| Digital 10 pins Cable 5m | 615 917 433 0 |
| CMD & ST 4000 Adapter | 615 917 671 0 |
| CMD 5000 Adapter | 615 917 672 0 |
| Delta Neck Holder | 615 936 530 0 |

| ITEM | PART NUMBER |
|-------------------------|---------------|
| RS232 Adapter | 615 917 670 0 |
| GSE 2500 Adapter | 615 917 674 0 |
| GSE 8500T Adapter | 615 917 675 0 |
| GSE 8500T/A Adapter | 615 917 676 0 |
| Analog 19 pins Adapter | 615 935 175 0 |
| Delta Demo Case (Empty) | 615 936 140 0 |

SOFTWARE

| | |
|--------------------------|---------------|
| Delta QC Licensed 1 User | 615 927 651 0 |
| Delta QC Licensed 5 User | 615 927 652 0 |
| Delta QC Advanced 1 User | 615 927 653 0 |
| Delta QC Advanced 5 User | 615 927 654 0 |

| MODEL | PART NUMBER | RANGE | ANGLE | DRIVE | INCLUDED RATCHET | LENGTH | WEIGHT |
|-------------|---------------|--------|-------------|-------|------------------|-----------|--------|
| Q-AUDIT 30 | 615 221 040 0 | 3-30 | 2.21-22.13 | YES | 9X12 | 0.35X0.47 | 3/8 |
| Q-AUDIT 150 | 615 221 041 0 | 15-150 | 11.06-110.6 | YES | 14X18 | 0.55X0.70 | 3/8 |
| Q-AUDIT 350 | 615 221 042 0 | 35-350 | 25.81-258.1 | YES | 14X18 | 0.55X0.70 | 3/8 |

WRT - WIRELESS ROTARY TRANSDUCER

The WRT is a means of **auditing not only the tools** (click-wrenches, slip-wrenches, nutrunners or Pulse tools*) but also **the assembly process, providing a detailed analysis of torque and angle information.**


With the WRT you can:

- Manual & Automatic Calibration (Automatic Adjustment) with CONNECT Smart hub
- SPC (Statistical Process Control)
- CM / CMK
- Demo mode



A **B** **C** **D**

| MODEL | A | B | C | D | E | F | G | H |
|--------------|-------|----|-------|------|------|------|------|------|
| WRT4-HEX1/4 | 115.8 | 45 | 138.3 | 33.8 | 61.5 | 20.5 | 25.5 | 20 |
| WRT10-HEX1/4 | 115.8 | 45 | 138.3 | 33.8 | 61.5 | 20.5 | 25.5 | 20 |
| WRT20-HEX1/4 | 115.8 | 45 | 138.3 | 33.8 | 61.5 | 20.5 | 25.5 | 20 |
| WRT25-SQ3/8 | 82.6 | 45 | 138.3 | 12.1 | 61.5 | 9 | 11 | 20 |
| WRT75-SQ3/8 | 82.6 | 45 | 138.3 | 12.1 | 61.5 | 9 | 11 | 20 |
| WRT180-SQ1/2 | 90.5 | 45 | 141.8 | 17 | 61.5 | 12 | 15.2 | 22.5 |
| WRT500-SQ3/4 | 106 | 56 | 151.9 | 24.6 | 68 | 13.4 | 23 | 28 |

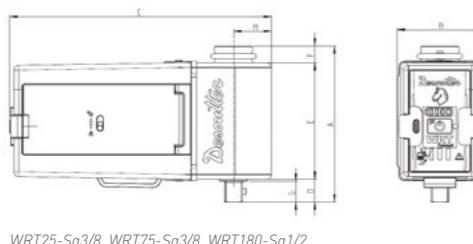

WRT25-Sq3/8, WRT75-Sq3/8, WRT180-Sq1/2

| PIC | MODEL | PART NUMBER | OUTPUT DRIVE | TORQUE | | | | WEIGHT | |
|-----|--------------|---------------|--------------|--------|-------|-------|-------|--------|-------|
| | | | | MIN. | MAX.* | MIN. | MAX.* | gr | lb |
| A | WRT4-HEX1/4 | 615 221 051 0 | 1/4 | 0.4 | 4 | 0.36 | 3.6 | 483.5 | 1.065 |
| A | WRT10-HEX1/4 | 615 221 052 0 | 1/4 | 1 | 10 | 0.88 | 8.8 | 484.7 | 1.068 |
| A | WRT20-HEX1/4 | 615 221 053 0 | 1/4 | 2 | 20 | 1.47 | 14.7 | 463.2 | 1.02 |
| B | WRT25-SQ3/8 | 615 221 054 0 | 3/8 | 2.5 | 25 | 1.84 | 18.4 | 486.4 | 1.07 |
| B | WRT75-SQ3/8 | 615 221 055 0 | 3/8 | 7.5 | 75 | 5.53 | 55.3 | 491.4 | 1.08 |
| C | WRT180-SQ1/2 | 615 221 056 0 | 1/2 | 18 | 180 | 13.27 | 132.7 | 599.7 | 1.32 |
| D | WRT500-SQ3/4 | 615 221 057 0 | 3/4 | 50 | 500 | 36.87 | 368.7 | 1094 | 2.41 |

*With Pulse tools, the WRT shall not be used over 50% of the maximum torque.

ACCESSORIES



ACCESSORIES INCLUDED

| ITEM | REFERENCES |
|---------------|---------------|
| 3 WRT Battery | 615 936 531 0 |

OPTIONAL ACCESSORIES

| ITEM | REFERENCES |
|---|---------------|
| 1 WRT 2x Adapters | 615 936 534 0 |
| 2 QA Charger | 615 936 461 0 |
| 3 WRT Battery | 615 936 531 0 |
| 4 WRT anti-rotation holder ¹ | 615 936 535 0 |
| 5 CVI KEY ² | 615 927 676 0 |

¹For angle tools with compatible sizes (tool diameter less than 43 mm, such as EABC 32-410, EABC 50-450, EABC 60-370, EABC 17-800-4Q, EABC 24-500-4Q, ELS330-300-A, etc.).

²The WRT Web User Interface uses a role-based authorization system. User permissions depend on the role assigned to the user with the CVI KEY. Without it, you will only have access to "Demo mode". To create an operation (tool & Pset), you need to enter your CVI KEY.

INTUITIVE WEB USER INTERFACE

View the results with the device of your choice: computer, tablet or smartphone !

The web user interface gives access to the result data base, curves, live results and the data download facility.

WRT offers three different ways to access its web user interface:

○ **EMBEDDED ACCESS POINT (DHCP) / WEB:** WRT hosts an embedded access point. You can update network settings directly through the intuitive Web User Interface and choose between static and DHCP methods for IP address allocation. It's ideal for scenarios where simplicity and self-contained connectivity are paramount.

○ **INFRASTRUCTURE MODE:** In this mode, WRT seamlessly integrates into your existing factory network. It's perfect for environments where additional Wi-Fi networks are undesirable or impractical.

○ **BY CABLE:** Use the cable for your first connection - it's a one-time requirement - then this old-school approach is also possible from this point forward..



DRT - DIGITAL ROTARY TRANSDUCERS

The DRT4 rotary transducer series are designed to measure torque output (Only) of any non-impact assembly tool, directly on your application in dynamic mode.



| MODEL | PART NUMBER | TORQUE RANGE | OUTPUT |
|---------------|-------------|--------------|------------------------|
| DRT 4 H 2 | 6151652090 | 0.2 - 2 | 0.15 - 1.5 HEX 1/4" |
| DRT 4 H 5 | 6151652100 | 0.5 - 5 | 0.37 - 3.7 HEX 1/4" |
| DRT 4 H 20 | 6151652110 | 2 - 20 | 1.47 - 14.7 HEX 1/4" |
| DRT 4 SQ 20 | 6151652120 | 2 - 20 | 1.47 - 14.7 SQ 1/4" |
| DRT 4 SQ 25 | 6151652130 | 2.5 - 25 | 1.84 - 18.4 SQ 3/8" |
| DRT 4 SQ 75 | 6151652140 | 7.5 - 75 | 5.53 - 55.3 SQ 3/8" |
| DRT 4 SQ 180 | 6151652150 | 18 - 180 | 13.2 - 132 SQ 1/2" |
| DRT 4 SQ 500 | 6151652160 | 50 - 500 | 36.8 - 368 SQ 3/4" |
| DRT 4 SQ 1400 | 6151652170 | 140 - 1400 | 103.2 - 1032 SQ 1" |
| DRT 4 SQ 3000 | 6151652180 | 300 - 3000 | 221.1 - 2211 SQ 1-1/2" |
| DRT 4 SQ 5000 | 6151652190 | 500 - 5000 | 368.5 - 3685 SQ 1-1/2" |
| DRT4 SQ 10000 | 6159351640 | 1000 - 10000 | 736.6 - 7375 SQ 1-1/2" |

Note: The DRT shall not be used with pulse tools over 50 % of the transducer nominal torque

FEATURES

- Torque range from 0,2 to 10000 Nm (0.15 to 7375 ft.lb).
- Strain gauges transducer : - sensitivity 2mV/V - accuracy +/-0.35% of max. torque.
- Built-in smart chip memory with calibration features : - type of transducer - sensitivity nominal load - serial number.

BENEFITS

- Automatic recognition thanks to internal memory chip storing main data values eliminating any setting mistakes and time losses.
- High reliability due to immunity from external noise thanks to digital communication.
- Communication to data analyzer not sensitive to the cable length.
- Long life durability thanks to industrial design from transducer to housing.

TRANSDUCER CABLES

| MODEL | PART NUMBER | OUTPUT |
|-----------------------------|-------------|--|
| 2M (78.7") - 10 PINS | 6159174300 | For DRT / PST / DSTxs / FCT - all Delta Models |
| 2M (78.7") SPIRAL - 10 PINS | 6159174320 | For DRT / PST / DSTxs / FCT - all Delta Models |
| 5M (196.8") - 10 PINS | 6159174330 | For DRT / PST / DSTxs / FCT - all Delta Models |

DIGITAL ROTARY TRANSDUCERS & ACCESSORIES

The DRT5 series associated with a Delta 6D or Delta 7D are including an Angle measurement encoder to allow both Torque AND Angle quality controls (preferred series in case you are using Angle strategies and/or monitoring).




| MODEL | PART NUMBER | TORQUE RANGE | OUTPUT |
|---------------|-------------|--------------|------------------------|
| DRT 5 H 2 | 6151652180 | 0.2 - 2 | 0.15 - 1.5 HEX 1/4" |
| DRT 5 H 5 | 6151652190 | 0.5 - 5 | 0.37 - 3.7 HEX 1/4" |
| DRT 5 H 20 | 6151652200 | 2 - 20 | 1.47 - 14.7 HEX 1/4" |
| DRT 5 SQ 20 | 6151652210 | 2 - 20 | 1.47 - 14.7 SQ 1/4" |
| DRT 5 SQ 25 | 6151652220 | 2.5 - 25 | 1.84 - 18.4 SQ 3/8" |
| DRT 5 SQ 75 | 6151652230 | 7.5 - 75 | 5.53 - 55.3 SQ 3/8" |
| DRT 5 SQ 180 | 6151652240 | 18 - 180 | 13.2 - 132 SQ 1/2" |
| DRT 5 SQ 500 | 6151652250 | 50 - 500 | 36.8 - 368 SQ 3/4" |
| DRT 5 SQ 1400 | 6151652260 | 140 - 1400 | 103.2 - 1032 SQ 1" |
| DRT 5 SQ 5000 | 6151652800 | 500 - 5000 | 368.5 - 3685 SQ 1-1/2" |

FEATURES

- Torque range from 0.2 to 5000 Nm (0.15 to 3685 ft.lb).
- Angle counting system 0.35° resolution.
- Strain gauges transducer : - sensitivity 2mV/V - accuracy +/-0.35% of max. torque.
- Built-in smart chip memory with calibration features : - type of transducer - sensitivity nominal load - serial number.

SAME SIZE FOR TORQUE OR TORQUE & ANGLE TRANSDUCER

| OUTPUT | A | B | C | E | H | F | G | | | | | |
|-----------|------|------|-----|------|-------|------|----|------|------|------|------|------|
| | Nm | in. | Nm | in. | Nm | in. | Nm | in. | Nm | in. | Nm | in. |
| HEX 1/4" | 116 | 4.56 | 31 | 1.22 | 71.9 | 2.83 | 56 | 2.2 | 15.5 | 0.61 | 39 | 1.53 |
| SQ 1/4" | 71.5 | 2.81 | 31 | 1.22 | 71.9 | 2.83 | 56 | 2.2 | 15.5 | 0.61 | 6 | 0.24 |
| SQ 3/8" | 77 | 3.03 | 31 | 1.22 | 71.9 | 2.83 | 56 | 2.2 | 15.5 | 0.61 | 8 | 0.31 |
| SQ 1/2" | 87 | 3.42 | 42 | 1.65 | 82.9 | 3.26 | 58 | 2.28 | 21 | 0.83 | 12 | 0.47 |
| SQ 3/4" | 106 | 4.17 | 52 | 2.05 | 92.9 | 3.66 | 66 | 2.60 | 26 | 1.02 | 21 | 0.83 |
| SQ 1" | 125 | 4.92 | 65 | 2.56 | 104.9 | 4.13 | 73 | 2.87 | 32.5 | 1.28 | 29 | 1.14 |
| SQ 1-1/2" | 165 | 6.5 | 106 | 4.17 | 148.5 | 5.85 | 88 | 3.46 | 53 | 2.09 | 35.2 | 1.39 |



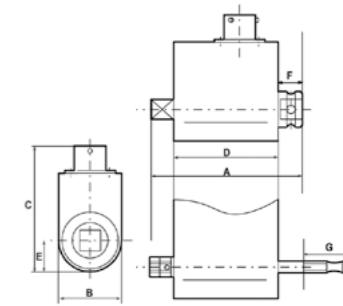


EPST - PULSE STATIC TRANSDUCER

Designed for testing hand wrenches, click wrenches, Pneumatic Pulse tools and electric nutrunners, the Pulse Static Transducer is the ideal solution to provide a periodic and static mean of control for audit at the station and will cover all your assembly tools in the production area.



(reminder: the joint simulator is required accessory in the case of a shut-off pulse or nutrunner tool test).

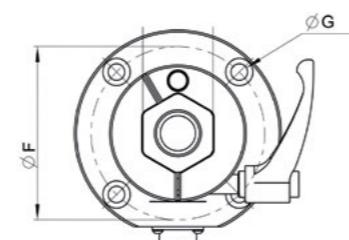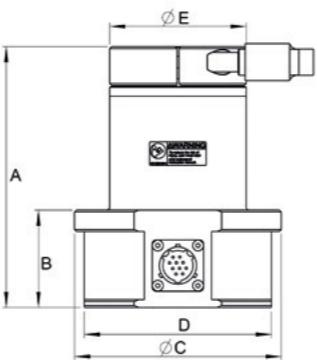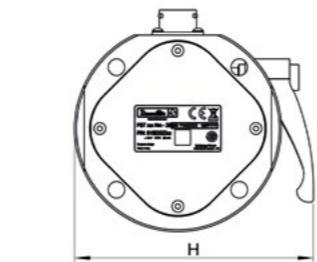


FEATURES

- Torque accuracy +/-0.35% of torque max.
- Built-in smart chip memory with calibration features:
- type of transducer - sensitivity nominal load - serial number
- Lever to clamp the Joint simulator firmly for impulse tools
- Recommended for Pulse tools

| MODEL | PART NUMBER | TORQUE RANGE | DIMENSIONS (MM) | | | | | | | | INPUT | WEIGHT | | |
|------------------|---------------|--------------|-----------------|-----|----|-----|-----|-----|-----|----------|-------|---------|------|------|
| | | Nm | ft.lb | A | B | C | D | E | F | G | H | Sq 1/2" | Kg | lb |
| PST 2 NM - 13 | 615 935 220 0 | 0.2 - 2 | 0.15-1.5 | 83 | 39 | 80 | 69 | 45 | 64 | 4x Ø 6.5 | / | Sq 1/2" | 1.4 | 3.1 |
| PST 5 NM - 13 | 615 935 221 0 | 0.5 - 5 | 0.37 - 3.7 | 83 | 39 | 80 | 69 | 45 | 64 | 4x Ø 6.5 | / | Sq 1/2" | 1.4 | 3.1 |
| PST 10 NM - 13 | 615 935 222 0 | 1-10 | 0.74-7.4 | 83 | 39 | 80 | 69 | 45 | 64 | 4x Ø 6.5 | / | Sq 1/2" | 1.4 | 3.1 |
| PST 25 NM - 36 | 615 935 223 0 | 2.5-25 | 1.8-18 | 134 | 50 | 106 | 96 | 70 | 89 | 4x Ø 8.5 | 123 | Hex 36 | 4 | 8.8 |
| PST 50 NM - 36 | 615 935 224 0 | 5-50 | 3.7-37 | 134 | 50 | 106 | 96 | 70 | 89 | 4x Ø 8.5 | 123 | Hex 36 | 4 | 8.8 |
| PST 100 NM - 36 | 615 935 225 0 | 10-100 | 7.4-74 | 134 | 50 | 106 | 96 | 70 | 89 | 4x Ø 8.5 | 123 | Hex 36 | 4 | 8.8 |
| PST 250 NM - 36 | 615 935 226 0 | 25-250 | 18.4-184 | 134 | 50 | 106 | 96 | 70 | 89 | 4x Ø 8.5 | 123 | Hex 36 | 4 | 8.8 |
| PST 500 NM - 50 | 615 935 227 0 | 50 - 500 | 36.9-369 | 170 | 50 | 148 | 136 | 108 | 125 | 6x Ø 8.5 | 180 | Hex 50 | 10.1 | 22.3 |
| PST 1000 NM - 50 | 615 935 228 0 | 100-1000 | 73.8-738 | 170 | 50 | 148 | 136 | 108 | 125 | 6x Ø 8.5 | 180 | Hex 50 | 10.1 | 22.3 |
| PST 2000 NM - 50 | 615 935 229 0 | 200-2000 | 147.5-1475 | 170 | 50 | 148 | 136 | 108 | 125 | 6x Ø 8.5 | 180 | Hex 50 | 10.1 | 22.3 |

JOINT SIMULATOR

A wide range of mechanical joint simulators are available to reproduce the joint behavior; installing the joint simulator on a transducer allows you to test a tool in the same repeatable working conditions. Each joint simulator reproduces a specific stiffness as described in its torque/angle characteristics. For each capacity, there are two versions: one reproducing a softer joint and one reproducing a harder joint.

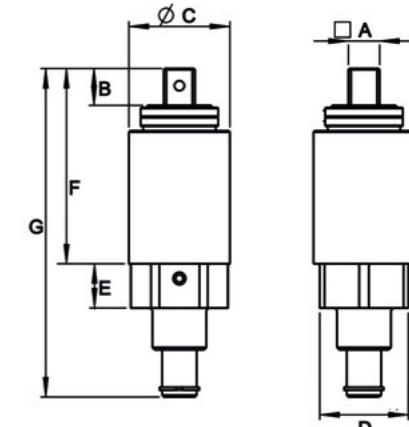

| MODEL | PART NUMBER | COLOR | DIMENSIONS (MM) | | | | | | | |
|-------------------------------|---------------|----------|-----------------|----|-----|----------|------|-------|-------|---|
| | | | Nm | A | B | C | D | E | F | G |
| DJS FOR DST AND PST 2 NM SOFT | 615 165 529 0 | YW - YW | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR DST AND PST 2 NM HARD | 615 165 530 0 | YW - BK | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR DST AND PST 5 NM SOFT | 615 165 531 0 | GR - YW | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR DST AND PST 5 NM HARD | 615 165 571 0 | GR - BK | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR PST 10 NM SOFT | 615 936 377 0 | RD - YW | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR PST 10 NM HARD | 615 936 378 0 | RD - BK | HEX 1/4" | 14 | 24 | SQ. 1/2" | 8 | 50 | 71,5 | |
| DJS FOR PST 25 NM SOFT | 615 936 379 0 | RD - YW | SQ. 3/8" | 11 | 34 | HEX 36 | 16,5 | 70 | 120,5 | |
| DJS FOR PST 25 NM HARD | 615 936 380 0 | RD - BK | SQ. 3/8" | 11 | 34 | HEX 36 | 16,5 | 70 | 120,5 | |
| DJS FOR PST 50 NM SOFT | 615 936 381 0 | BL - YW | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 50 NM HARD | 615 936 382 0 | BL - BK | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 100 NM SOFT | 615 936 365 0 | VL - YW | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 100 NM HARD | 615 936 366 0 | VL - BK | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 250 NM SOFT | 615 936 384 0 | GY - YW | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 250 NM HARD | 615 936 385 0 | GY - BK | SQ. 1/2" | 15 | 41 | HEX 36 | 18 | 84 | 133,5 | |
| DJS FOR PST 500 NM SOFT | 615 936 369 0 | BK - YW | SQ. 3/4" | 22 | 59 | HEX 50 | 30 | 141 | 224 | |
| DJS FOR PST 500 NM HARD | 615 936 370 0 | BK - BK | SQ. 3/4" | 22 | 59 | HEX 50 | 30 | 141 | 224 | |
| DJS FOR PST 1000 NM | 615 936 386 0 | NO COLOR | SQ. 1" | 28 | 90 | HEX 50 | 30 | 179 | 273 | |
| DJS FOR PST 2000 NM | 615 936 393 0 | NO COLOR | SQ. 1 1/2" | 38 | 138 | HEX 50 | 30 | 168,2 | 218,2 | |

ADAPTERS & COUPLINGS


| MODEL | PART NUMBER | MODEL | PART NUMBER | MODEL | PART NUMBER |
|--|---------------|----------------|---------------|-------------------|---------------|
| Accessories for Static transducers & Joint simulators | | | | | |
| 3/4" M-1/4" F | 615 397 205 0 | 1/2" M-3/8" F | 615 936 111 0 | HEX 1/4" M-1/4" F | 615 936 118 0 |
| 3/4" M-3/8" F | 615 397 206 0 | 1/2" F-3/8" F | 615 936 112 0 | HEX 1/4" M-3/8" F | 615 936 119 0 |
| 1" M-1/2" F | 615 397 207 0 | 1/2" M-1/2" F | 615 936 113 0 | 1" F-3/4" F | 615 936 126 0 |
| 1"1/4 M-1/2" F | 615 397 208 0 | 1"1/4 M-3/4" F | 615 936 114 0 | 3/4" F-1/2" F | 615 936 130 0 |
| 1" 1/4 M-3/4" F | 615 397 209 0 | 1/4" F-3/8" F | 615 936 115 0 | 1" 1/2 F-1" 1/2 F | 615 936 436 0 |
| 1/4" F-1/4" F | 615 397 210 0 | 1" 1/4 M-1" F | 615 936 116 0 | 1/2" F-1/2" F | 615 165 573 0 |
| 3/8" F-3/8" F | 615 397 211 0 | 1" F-1" F | 615 936 117 0 | 3/4" F-3/4" F | 615 165 576 0 |
| 1" M-3/4" F | 615 936 110 0 | | | | |

| MODEL | PART NUMBER |
|-------------------|---------------|
| HEX 36 M-3/8" F | 615 936 398 0 |
| HEX 36 M-1/2" F | 615 936 399 0 |
| HEX 50 M-1/2" F | 615 936 431 0 |
| HEX 50 M-3/4" F | 615 936 432 0 |
| HEX 50 M-1" F | 615 936 433 0 |
| HEX 1/4" M-1/4" F | 615 936 118 0 |
| HEX 1/4" M-3/8" F | 615 936 119 0 |

DSTxs SERIES - DIGITAL STATIC TRANSDUCERS



Ideal for Nanodrivers.

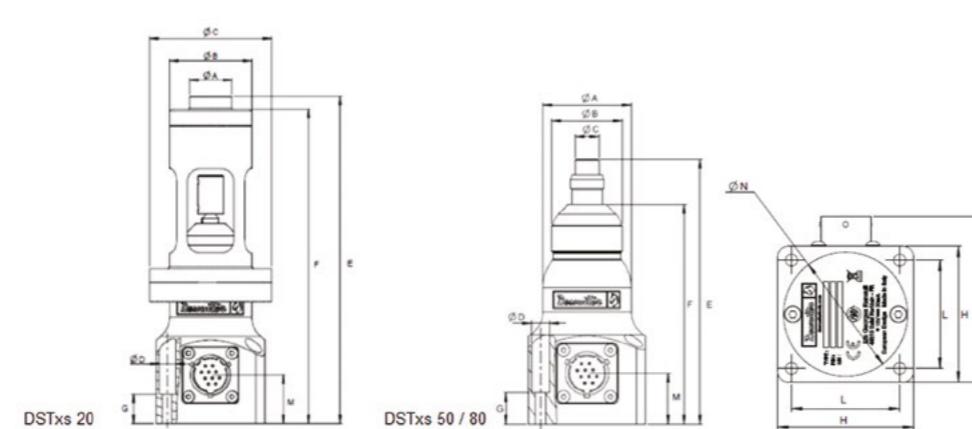

FEATURES

- Accuracy from 10% to 100% of the nominal torque : +/-0,5% FSD (Full Scale Deviation) - Overload at 120% of nominal capacity.
- Stability of Zero offset with temperature: < +/-0.1% FSD/°C - Operating temperature: 5 to 40°C.
- Built-in memory with calibration features: Serial Number, Transducer Type, Sensitivity, Nominal Load, Calibration / Maintenance date, Tightening counter, Damage limit.

BENEFITS


- Automatic recognition thanks to internal memory chip storing main data values eliminating any setting mistakes and time losses.
- High reliability due to immunity from external noise thanks to digital communication.
- Communication to data analyzer not sensitive to the cable length.

| MODEL | PART NUMBER | TORQUE RANGE | SQUARE DRIVE | DIMENSIONS [MM] | | | | | | | | | | WEIGHT | | |
|--------------|---------------|--------------|--------------|-----------------|-----|-------|----|-------|------|-------|-----|-------|------|--------|------|-----|
| | | | | Ø A | Ø B | Ø C | L | H | Ø A | Ø B | Ø C | L | H | Kg | lb | |
| DSTxs 20 cNm | 615 935 220 0 | 2-20 | 0.17-1.77 | dia 3mm | 20 | 0.787 | 39 | 1.535 | 58 | 2.283 | 41 | 1.614 | 51.5 | 2.027 | 0.56 | 1.2 |
| DSTxs 50 cNm | 615 935 221 0 | 5-50 | 0.44-4.42 | Hex 1/4 | 39 | 1.535 | 32 | 1.259 | 10.5 | 0.413 | 41 | 1.614 | 51.5 | 2.027 | 0.42 | 0.9 |
| DSTxs 80 cNm | 615 935 222 0 | 8-80 | 0.70-7.08 | Hex 1/4 | 39 | 1.535 | 32 | 1.259 | 10.5 | 0.413 | 41 | 1.614 | 51.5 | 2.027 | 0.42 | 0.9 |

JOINT SIMULATOR KITS


| MODEL | PART NUMBER | JOINTS COVERED | | | ADAPTER | SCREW SIZE |
|----------|---------------|----------------|-------------|------------|------------|-----------------|
| DJSxs 20 | 615 936 445 0 | Hard / mini | Soft / mini | Hard / max | Soft / max | DIA 3MM M2 |
| DJSxs 50 | 615 936 446 0 | 5-15 cNm | 5-15 cNm | 50 cNm | 50 cNm | HEX 1/4 M2 & M3 |
| DJSxs 80 | 615 936 447 0 | 8-24 cNm | 8-24 cNm | 80 cNm | 80 cNm | HEX 1/4 M3 |

| ITEM | CONTENT OF THE DJS KIT SUITCASE |
|------|--|
| 1 | DJSxs assembly - min. torque - Soft joint x1 |
| 2 | Spare compression spacer - min. torque - Soft x4 |
| 3 | Spare compression spacer - min. torque - Hard x1 |
| 4 | DJSxs assembly - min. torque - Hard joint x1 |
| 5 | DJSxs assembly - nominal torque - Hard joint x1 |
| 6 | Spare compression spacer - nominal torque - Hard joint x1 |
| 7 | Spare compression spacer - nominal torque - Soft joint x4 |
| 8 | DJSxs assembly - nominal torque - Soft joint x1 |
| 9 | DJSxs20 assembly - min./nominal torque - Soft joint - spacer for DSTxs adapter |
| 10 | DJSxs20 assembly - min./nominal torque - Hard - spacer for DSTxs adapter |

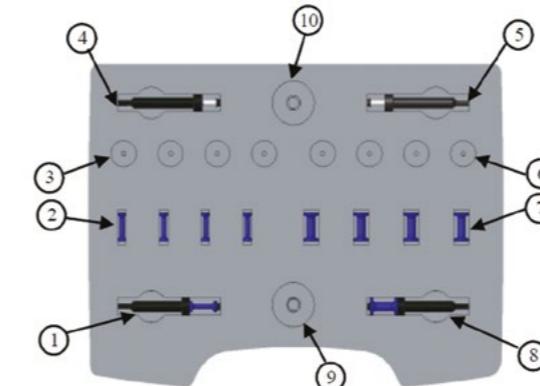

FCT SERIES - CLAMP FORCE TRANSDUCERS

The purpose of the FCT is to measure the repeatability of a pulse tool in achieving a constant tension independently from the friction effects and detect a deviation over time. Delta 6D/7D can display both the load and equivalent torque.

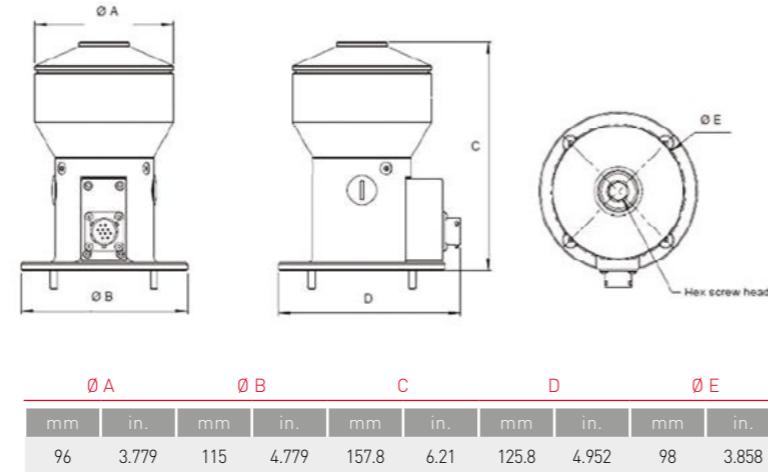

Ideal for Pulse tools.

FEATURES

- Accuracy +/-0,5% of Applied Force Reading Value.
- Built-in Load Cell.
- Used with Delta xD data collectors and cables.
- 12 hours autonomy with the Delta 6D/7D.
- Allows a display of both Clamping Force and Torque (K factor).
- Up to 2000 Hz filter selection.
- With Delta 6D/7D, RS-232 interface to download readings.
- Large screen and easy to use menus with Delta 6D/7D.
- Supplied with screw kit and 3/8" socket SW13.

BENEFITS

- Measures the repeatability of pulse tools to achieve a target clamping force.
- By measuring the clamp force instead of the torque delivered, the adverse effects of adding an in-line torque transducer are eliminated.
- As most design offices specify a clamping force, measuring the actual clamping force allows to eliminate the uncertainty linked to the translation in torque of a clamping value.

ACCESSORIES

ACCESSORIES INCLUDED

| | ITEM | PART NUMBER |
|-------|------------------------------------|---------------|
| FCT30 | 1 FCT30 Screw | 615 936 484 0 |
| | 2 Sleeve Drive Sockets 3/8" - 13mm | 615 811 781 0 |
| FCT60 | 1 FCT60 Screw | 615 936 485 0 |
| | 2 Sleeve Drive Sockets 3/8" - 18mm | 615 811 784 0 |



Oil recommended to fill the oil bath: 75W-90.

CALIBRATION BENCH


EMBEDDED TRANSDUCERS:

Assembly tools calibration process requires a flexible and versatile solution, high quality performance even in production lines. Desoutter Tools is proud to present the Delta Cart, an ergonomic and attractive solution to improve quality in assembly processes.

- ▶ Delta Cart offers a wide torque range since it can be configured up to 4 static transducers to cover from 0.2 Nm to 2 000 Nm [0.15 to 1 475 ft.lb] in a very compact dimensions (510mm width), making the Delta Cart the ideal solution for tool testing in assembly production lines.
- ▶ PST High accuracy static transducers with locking system specially designed for pulse tool calibration
- ▶ ISO RIG (mandatory over 200Nm) System for torque wrench calibration



Embedded PC equipped with wide 12" color touch screen lets operators to start tool testing in a few seconds and few steps.

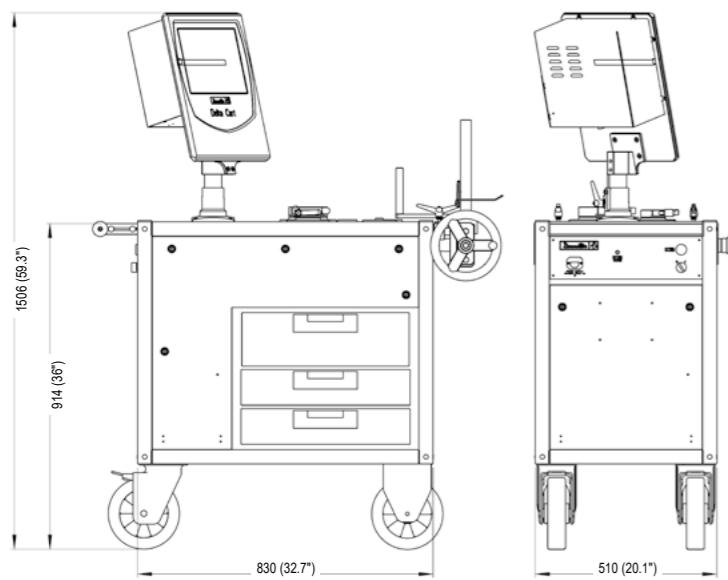

Delta Cart includes all adapters, reaction bars and suitable joint simulators. Optional ISO RIG for torque wrench to eliminate operator influence during calibration, reducing efforts for high torque range.

DELTA CART TOOL CALIBRATION




Electric and Pneumatic Nutrunner



Shut off and non shut off Pulse Tool



Torque wrench

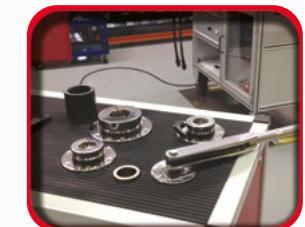

Click wrench


The Delta Cart is able to follow your tools during the complete life span: by performing capacity test (Cm/Cmk) before tool is introduced into production, or monitoring tool performance during production assembly process by performing Statistic Process Control (SPC) test.

FEATURES

- ▶ Configurable torque range from 1 Nm to 2 000Nm
- ▶ Torque reaction bar and joint simulator included
- ▶ External DRT communication for in-line calibration
- ▶ Angle Strategy with external DRT5
- ▶ CVI2 and CVI3 autocalibration
- ▶ Double reading calibration with automatic deviation check

EMBEDDED SOFTWARE WITH LOCAL TOOL DB (SQL SERVER)

- ▶ Tools Inventory with calibration status and next calibration date (Excel sheet export)
- ▶ Calibration STATUS
- ▶ Cm/Cmk Reports
- ▶ SPC X/R Charts
- ▶ USER Management - login per user

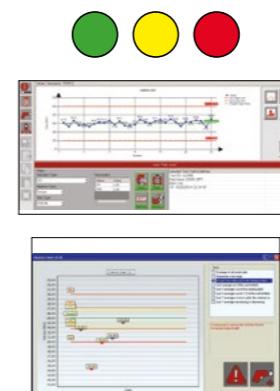

CLIENT - SERVER ARCHITECTURE

- Ideal for > 1 cart management
- All Calibration data always synchronized with unique Server database
- Fast Ethernet communication

ROUTE MANAGEMENT

- Send to Delta Cart just the Tool to be tested

SOFTWARE FEATURES

| | |
|---|---|
| Torque Wrench, Electric or Pneumatic Nutrunner Test, Pulse Test Cm/Cmk - ISO 3534 | Local Test Database up to 30000 Tests - Setting : Nominal Min Max Torque, unit of measure, Test Id, Test Description, Transducer number, Timeout setting Cm/Cmk, min, max, average, sigma |
| ISO 6789 - ISO 5393 | Automatic test report |
| Statistic Control - ISO 8258 Print | X/R Charts for trend control Direct Printing from Delta Cart PC software |
| Export Curve | Certificate export to PDF or XLS Torque/Time or Torque/Angle with external DRT5 |
| Barcode Configurable for each test | External USB N.m - gf.cm - Kgf.cm - kgf.m - ozf.in - lbf.in - lbf.ft |
| Languages | English, French, Italian, German, Russian |

ALPHA LOW TORQUE ANALYZER

Dedicated torque analyzers for the setting and static test checks of low torque screwdrivers, either pneumatic or electric.



Embedded Transducer & Battery



TECHNICAL SPECIFICATIONS

| | |
|-------------------|--|
| Torque Transducer | Embedded |
| Torque Accuracy | +/- 1 % of readings |
| Tools Testing | Torque Wrench, Nutrunner or Pulse Tools |
| Statistic | Min. Max, Average, Standard Deviation |
| Results Storage | 1000 + 10 curves with DeltaQC Licenced |
| Multi-units | N.m, Kg.m, Kg.cm, Oz.in, Lb.in, Lb.ft, N.cm |
| Display | Red, Green, Blue blacklight |
| Power Supply | Embedded Battery External power supply |
| Battery Autonomy | Up to 12 hours |
| Languages | French, English, Spanish, Italian, Deutsch, Portuguese |
| Software | Free Delta QC Software to export by USB result |

ALPHA LOW TORQUE ANALYZER

FEATURES

- Alpha D Series is designed to monitor and collect torque check results from screwdrivers, torque wrenches or click wrenches.
- Ideal to tune the tools thanks to real time statistics on color display and high capacity torque results storage.
- Traceability with included software result acquisition with time stamp, including PDF or XLS reports.
- Three models with embedded transducer to cover torque range from 0,1 to 16 Nm. All models are provided with two included joint simulators to test nutrunner according to different joint stiffness condition.

Backlight RGB color display with acoustic buzzer

Hard & Soft Joint Simulator



| MODEL | PART NUMBER |
|--------------------------|---------------|
| DJS FOR ALPHA_D1 SOFT | 615 936 120 0 |
| DJS FOR ALPHA_D1 HARD | 615 936 121 0 |
| DJS FOR ALPHA_D5 SOFT | 615 936 122 0 |
| DJS FOR ALPHA_D5 HARD | 615 936 123 0 |
| DJS FOR ALPHA_D16 SOFT | 615 936 124 0 |
| DJS FOR ALPHA_D16 HARD | 615 936 125 0 |
| UNIVERSAL POWER SUPPLIER | 615 936 143 0 |

| MODEL | PART NUMBER | P. CHARGER | TORQUE RANGE | DEPTH | WIDTH | HEIGHT | WEIGHT | | | | | |
|----------|---------------|------------|--------------|--------------|-------|--------|--------|------|----|------|------|-----|
| ALPHA 1D | 615 935 140 0 | 110/240V | 0.1 - 1 | 0.88 - 8.85 | 106 | 4.17 | 180 | 7.09 | 70 | 2.76 | 0.95 | 2.1 |
| ALPHA 6D | 615 935 141 0 | 110/240V | 0.5 - 5 | 4.42 - 44.25 | 106 | 4.17 | 180 | 7.09 | 70 | 2.76 | 0.95 | 2.1 |
| ALPHA 7D | 615 935 142 0 | 110/240V | 1.6 - 16 | 14.1 - 141.6 | 106 | 4.17 | 180 | 7.09 | 70 | 2.76 | 0.95 | 2.1 |

All models are supplied with external power supply, suitable hard and soft joint simulators and Delta QC Software.



QSHIELD - STANDALONE



AUDIT & JOINT ANALYSIS DIGITAL WRENCH

QSHIELD-S SERIES provide a freedom for Quality Operators and Process Engineers to use the wrench in a free mode and independently from production datas: Joint check during audits, conduct Joint analysis on prototypes to or simply retightening mode to secure a joint.

- 5 methods of Residual Torque checks [as per VDI-VDE 2645 part 3].
- Menus are accessible for a versatile usage by a trained staff.
- The vibrating handle (configurable threshold) provides an immediate feedback even in a loud environment of work.
- Results & Curves are stored in the wrench until downloaded on Delta QC (Quality Control Software).



| MODEL | PART NUMBER | RANGE | ANGLE | DRIVE | INCLUDED RATCHET | LENGTH WITHOUT RATCHET | LEVER ARM* | WEIGHT |
|----------------|---------------|----------|---------------|-------|------------------|------------------------|------------|-----------------------------------|
| Q-SHIELD 30-S | 615 935 210 0 | 3 - 30 | 2.21 - 22.13 | ✓ | 9X12 | 0.35X0.47 | 3/8 | 402 mm 15.83 in. 320 12.6 0.7 1.5 |
| Q-SHIELD 150-S | 615 935 211 0 | 15 - 150 | 11.06 - 110.6 | ✓ | 14X18 | 0.55X0.71 | 1/2 | 418 16.46 342 13.5 0.8 1.7 |
| Q-SHIELD 200-S | 615 935 212 0 | 20 - 200 | 14.75 - 147.5 | ✓ | 14X18 | 0.55X0.71 | 1/2 | 627 24.7 552 21.75 1.6 3.5 |
| Q-SHIELD 350-S | 615 221 038 0 | 35 - 350 | 25.81 - 258.1 | ✓ | 14X18 | 0.55X0.71 | 3/4 | 694 27.33 625.5 24.62 2.6 5.7 |
| Q-SHIELD 400-S | 615 935 213 0 | 40 - 400 | 29.5 - 295.0 | ✓ | 14X18 | 0.55X0.71 | 3/4 | 1028 40.48 960 37.8 3.2 7.0 |
| Q-SHIELD 500-S | 615 935 214 0 | 50 - 500 | 36.88 - 368.8 | ✓ | 21X26 | 0.82X1.02 | 3/4 | 1137 44.77 1100 43.3 5.5 12.1 |
| Q-SHIELD 800-S | 615 935 215 0 | 80 - 800 | 59.0 - 590.0 | ✓ | DIA 28 | DIA 1.1 | 1 | 1314 51.74 1362 53.62 6.7 14.7 |
| Q-SHIELD 900-S | 615 935 216 0 | 90 - 900 | 66.38 - 663.8 | ✓ | DIA 28 | DIA 1.1 | 1 | 1392 54.8 1440 56.7 8.2 18.0 |

* Useful length is from Ratchet axis to handle middle.
All models are supplied with box including reversible ratchet with TAG [QShield Batteries supplied separately].



| PIC REF | MODEL | PART NUMBER | HEIGHT | LENGTH | WIDTH | WEIGHT |
|---------|------------------------|---------------|--------|--------|----------|---------------------|
| A | QSHIELD BATTERY | 615 936 500 0 | - | - | 110 4.33 | Ø 22 Ø 8.86 80 0.18 |
| B | BATTERY DOUBLE CHARGER | 615 936 461 0 | 68 | 2.67 | 210 8.26 | 150 5.90 1290 2.84 |
| C | Q-SHIELD 2X ADAPTERS | 615 936 533 0 | - | - | - | - 160 0.35 |
| D | WRENCH PROTECTION | 615 936 504 0 | - | - | - | - |

| DETAQC SOFTWARE | FREE | LICENSED | ADVANCED |
|---------------------|------|----------|----------|
| PSET PROGRAMMING | ✓ | ✓ | ✓ |
| RESULT VIEWER | ✓ | ✓ | ✓ |
| RESULT EXCEL EXPORT | ✓ | ✓ | ✓ |
| CURVE VIEWER | | ✓ | ✓ |
| RESULT DATABASE | | | ✓ |

| MODEL | PART NUMBER |
|-------------------------|---------------|
| DETAQC LICENSED 1 USER | 615 927 651 0 |
| DETAQC LICENSED 5 USERS | 615 927 652 0 |
| DETAQC ADVANCED 1 USER | 615 927 653 0 |
| DETAQC ADVANCED 5 USERS | 615 927 654 0 |


QSHEILD-S STRATEGIES

TECHNICAL SPECIFICATIONS



| | |
|------------------------------------|--|
| Standards compliance | ISO 6789:2017 / VDI-VDE 2645-2 & -3 |
| Torque Accuracy | +/-1% of torque reading +/-1 digit from 10 to 100% of nominal torque. |
| Angle Accuracy | +/-1% from 3°/Sec to 250°/sec |
| Predefined Pset | 250 Psets with T/A defined in Delta QC Software |
| Batch Count | Up to 99 |
| Results | 1000 in memory, last 99 results accessible directly on the wrench display (FIFO) without external PC or software |
| Curves | 25 curves with Delta QC licensed |
| Quality Audit & Testing Strategies | Residual Torque/Angle Automatic, Residual Peak/Torque, Residual Torque/Angle, Residual Minimum after breakaway, Residual Intersection determination, Residual Gradient change, Residual Loose and Tighten, Yield Point (Joint Analysis), Drag Torque |
| Tightening Strategies | Torque/Time, Torque & Angle, Torque+Angle CW/CCW Tightenings |
| Extension Management | Torque and Angle bending correction per Sset |
| USB Communication | Bi-directional communication to Delta QC Software |
| RGB Display | Red / Green / Blue backlight |
| Battery | Li-ion battery |
| Power Autonomy | 10 hours on QShield-S |
| Multi-Units | N.m, kgf.m, lbf.ft, lbf.in, ozf.ft, ozf.in, kp.m, dN.m |
| Languages | English, Spanish, German, Portuguese, French, Italian |
| Software | Free Delta QC Software to define Pset and download results (extended capabilities with Licensed and Advanced versions) |

BENEFITS

- Real residual torque value without any special programming or setting from operator
- Save time no PC setting are required
- No risk to release an over loaded fastener as mean value is saved
- Residual value operator independent
- Export data for quality & statistic analysis
- Perfect for fast & accurate pulse tools setting

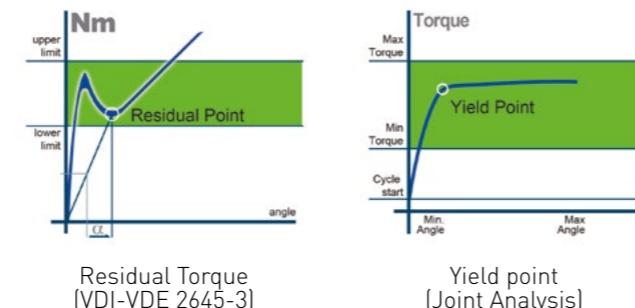

OTHER TIGHTENING STRATEGIES ARE ALSO AVAILABLE

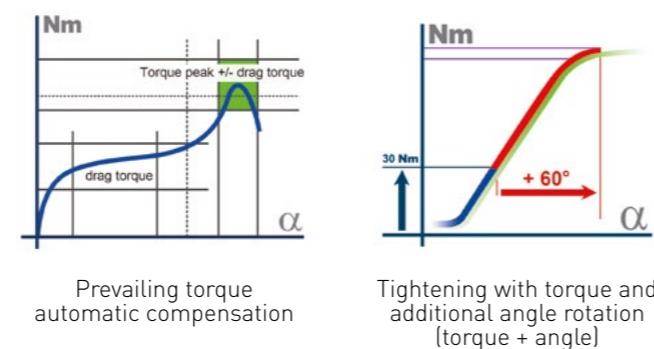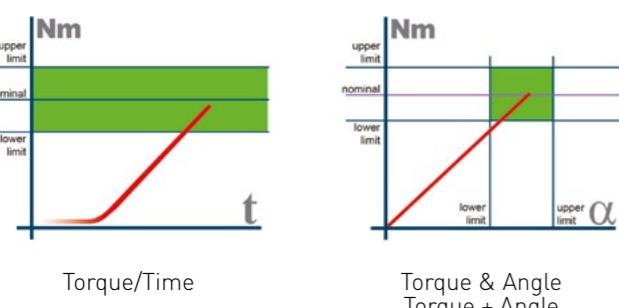

QUALITY ASSURANCE - BEST PRACTICES

ENSURE QA IN TIGHTENING REQUIRE:

► Initial Tool verification



► Routine residual torque online verification



► Routine & Reactive dynamic online verification



► Routine tool transducer calibration



► Routine plant standard calibration (in ISO/IEC 17025 Accredited laboratories)



► Data retention



IMPORTANT ELEMENTS TO CONSIDER IN SELECTING YOUR QUALITY EQUIPMENTS

- List Torque specifications / Quality Control specifications.
- Classification of your joints (Criticality of assembly operations in the Control Plan).
- Processes for tool testing, joint testing and standard calibration equipment.
- Ensure data is collected, maintained and accessible.

QSHIELD - CONNECTED



QSHIELD-C ON CONNECT

QSHIELD-C SERIES is a unique flexible solution to secure safety and quality critical applications on production lines, either requiring the highest precision on both torque and angle, tightening sequences with interchangeable heads, or simply enable assembly in difficult access conditions. It's a step in the evolution of processes to ramp up until production volumes justify investments to semi-automatic or fully automated processes.


Ultimately, it's also accurate and flexible enough to allow a rework from previous stations.



| MODEL | PART NUMBER | RANGE | ANGLE | DRIVE | INCLUDED RATCHET | LENGTH WITHOUT RATCHET | LEVER ARM* | WEIGHT |
|----------------|---------------|----------|---------------|-------|------------------|------------------------|------------|--------------------------------------|
| Q-SHIELD 30-C | 615 935 200 0 | 3 - 30 | 2.21 - 22.13 | ✓ | 9X12 | 0.35X0.47 | 3/8 | 402 mm 15.83 in. 320 12.6 kg 0.7 lb. |
| Q-SHIELD 150-C | 615 935 201 0 | 15 - 150 | 11.06 - 110.6 | ✓ | 14X18 | 0.55X0.71 | 1/2 | 418 16.46 342 13.5 0.8 1.7 |
| Q-SHIELD 200-C | 615 935 202 0 | 20 - 200 | 14.75 - 147.5 | ✓ | 14X18 | 0.55X0.71 | 1/2 | 627 24.7 552 21.75 1.6 3.5 |
| Q-SHIELD 350-C | 615 221 037 0 | 35 - 350 | 25.81 - 258.1 | ✓ | 14X18 | 0.55X0.71 | 3/4 | 694 27.33 625.5 24.62 2.6 5.7 |
| Q-SHIELD 400-C | 615 935 203 0 | 40 - 400 | 29.5 - 295.0 | ✓ | 14X18 | 0.55X0.71 | 3/4 | 1028 40.48 960 37.8 3.2 7.0 |
| Q-SHIELD 500-C | 615 935 204 0 | 50 - 500 | 36.88 - 368.8 | ✓ | 21X26 | 0.82X1.02 | 3/4 | 1137 44.77 1100 43.3 5.5 12.1 |
| Q-SHIELD 800-C | 615 935 205 0 | 80 - 800 | 59.0 - 590.0 | ✓ | DIA 28 | DIA 1.1 | 1 | 1314 51.74 1362 53.62 6.7 14.7 |
| Q-SHIELD 900-C | 615 935 206 0 | 90 - 900 | 66.38 - 663.8 | ✓ | DIA 28 | DIA 1.1 | 1 | 1392 54.8 1440 56.7 8.2 18.0 |

* Useful length is from Ratchet axis to handle middle. All models are supplied with box including reversible ratchet with TAG (QShield Batteries supplied separately).


| PIC REF | MODEL | PART NUMBER | HEIGHT | LENGTH | WIDTH | WEIGHT |
|---------|------------------------|---------------|--------|---|---------|----------|
| A | QSHIELD BATTERY | 615 936 500 0 | - | 110 mm 4.33 in. Ø 22 gr 80 0.18 lb | | |
| B | BATTERY DOUBLE CHARGER | 615 936 461 0 | 68 | 2.67 210 mm 8.26 in. 150 Ø 5.90 1290 2.84 | | |
| C | Q-SHIELD 2X ADAPTERS | 615 936 533 0 | - | - - - - | - - - - | 160 0.35 |
| D | WRENCH PROTECTION | 615 936 504 0 | - | - - - - | - - - - | - - - - |

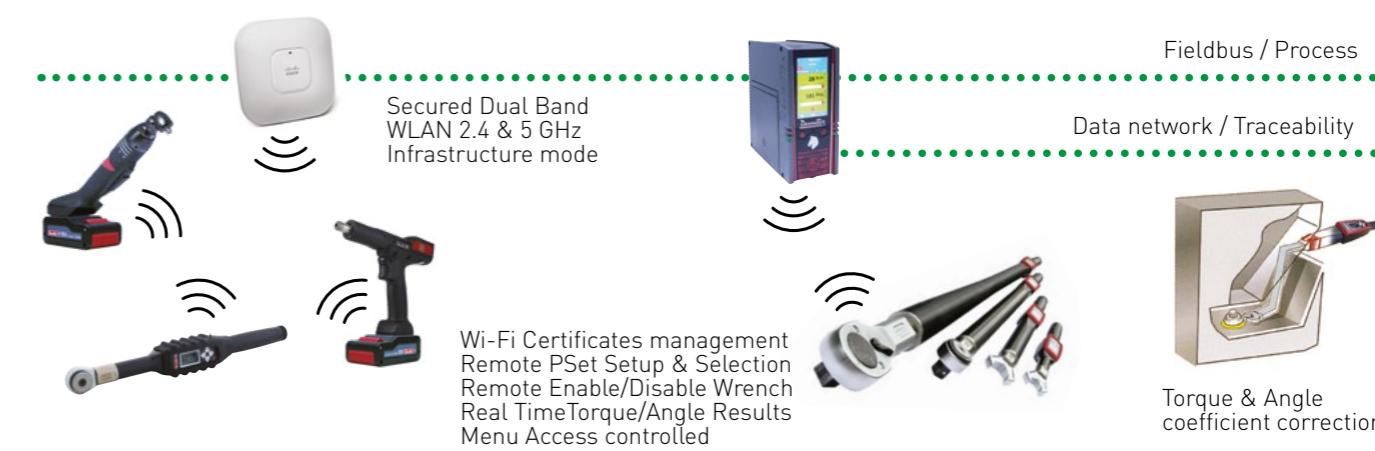


EQSHIELD-C STRATEGIES




- TORQUE STRATEGY:**
Tightening to a Target Torque
with a monitoring of the Angle and Torque
(OK if both Torque and Angle are within Min/Max)

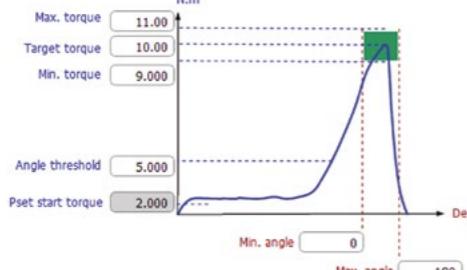

- ANGLE STRATEGY:**
Tightening to a Target Angle
with a monitoring of the Torque and Angle
(OK if both Torque and Angle are within Min/Max)

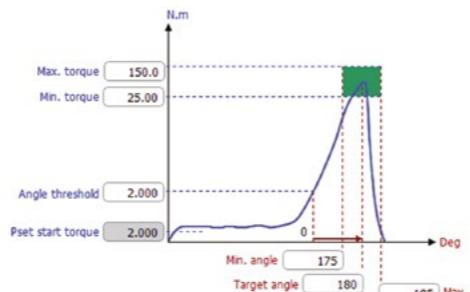

- RESIDUAL TORQUE STRATEGY:**
Joint check in Production on pre-tightened joints
(NOK management)

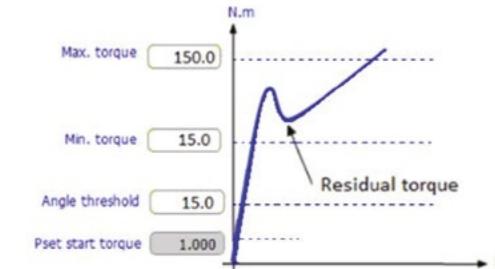

Triple result detection
Residual + Breakaway (B)
+ Peak Torque (P)



BENEFITS

- Accuracy for critical tightenings
- Wide torque range to replace click wrenches
- Production data traceability
- Repair station fastening capability
- Difficult access joints tightening
- Re-hit detection
- Low calibration cost
- Back up tool for safety & quality critical applications



7 TYPICAL SCENARIOS

- 1 Start of production (low quantities - ROI)
- 2 Difficult access conditions
- 3 More accuracy
- 4 Sequence using different end-fittings
- 5 Tighten to angle
- 6 Rework station (Diversity & Uptime)
- 7 PCT Test (Residual torque / Joint check)



DIGITAL WRENCH ACCESSORIES

END FITTINGS WITH EMBEDDED RFID TAG* AND NO TAG



| OPEN END - METRIC | TAG | NO TAG |
|----------------------------|---------------|---------------|
| DRIVE 9X12 OPEN END 7 MM | 615 936 152 0 | 615 397 055 0 |
| DRIVE 9X12 OPEN END 8 MM | 615 936 153 0 | 615 397 056 0 |
| DRIVE 9X12 OPEN END 9 MM | 615 936 154 0 | 615 397 057 0 |
| DRIVE 9X12 OPEN END 10 MM | 615 936 155 0 | 615 397 058 0 |
| DRIVE 9X12 OPEN END 11 MM | 615 936 156 0 | 615 397 059 0 |
| DRIVE 9X12 OPEN END 12 MM | 615 936 157 0 | 615 397 060 0 |
| DRIVE 9X12 OPEN END 13 MM | 615 936 158 0 | 615 397 061 0 |
| DRIVE 9X12 OPEN END 14 MM | 615 936 159 0 | 615 397 062 0 |
| DRIVE 9X12 OPEN END 15 MM | 615 936 160 0 | 615 397 063 0 |
| DRIVE 9X12 OPEN END 16 MM | 615 936 161 0 | 615 397 064 0 |
| DRIVE 9X12 OPEN END 17 MM | 615 936 162 0 | 615 397 065 0 |
| DRIVE 9X12 OPEN END 18 MM | 615 936 163 0 | 615 397 066 0 |
| DRIVE 9X12 OPEN END 19 MM | 615 936 164 0 | 615 397 067 0 |
| DRIVE 14X18 OPEN END 13 MM | 615 936 194 0 | 615 397 131 0 |
| DRIVE 14X18 OPEN END 14 MM | 615 936 195 0 | 615 397 132 0 |
| DRIVE 14X18 OPEN END 15 MM | 615 936 196 0 | 615 397 133 0 |
| DRIVE 14X18 OPEN END 16 MM | 615 936 197 0 | 615 397 134 0 |
| DRIVE 14X18 OPEN END 17 MM | 615 936 198 0 | 615 397 135 0 |
| DRIVE 14X18 OPEN END 18 MM | 615 936 199 0 | 615 397 136 0 |
| DRIVE 14X18 OPEN END 19 MM | 615 936 200 0 | 615 397 137 0 |
| DRIVE 14X18 OPEN END 21 MM | 615 936 201 0 | 615 397 138 0 |
| DRIVE 14X18 OPEN END 22 MM | 615 936 202 0 | 615 397 139 0 |
| DRIVE 14X18 OPEN END 24 MM | 615 936 203 0 | 615 397 140 0 |
| DRIVE 14X18 OPEN END 27 MM | 615 936 204 0 | 615 397 141 0 |
| DRIVE 14X18 OPEN END 30 MM | 615 936 205 0 | 615 397 142 0 |
| DRIVE 14X18 OPEN END 32 MM | 615 936 206 0 | 615 397 143 0 |
| DRIVE 14X18 OPEN END 34 MM | 615 936 207 0 | 615 397 144 0 |



| FLARED END - METRIC | TAG | NO TAG |
|-----------------------------|---------------|---------------|
| DRIVE 9X12 FLARED END 10 MM | 615 936 179 0 | 615 397 103 0 |
| DRIVE 9X12 FLARED END 11 MM | 615 936 180 0 | 615 397 104 0 |
| DRIVE 9X12 FLARED END 12 MM | 615 936 181 0 | 615 397 105 0 |
| DRIVE 9X12 FLARED END 13 MM | 615 936 182 0 | 615 397 106 0 |
| DRIVE 9X12 FLARED END 14 MM | 615 936 183 0 | 615 397 107 0 |
| DRIVE 9X12 FLARED END 16 MM | 615 936 184 0 | 615 397 108 0 |
| DRIVE 9X12 FLARED END 17 MM | 615 936 185 0 | 615 397 109 0 |
| DRIVE 9X12 FLARED END 18 MM | 615 936 186 0 | 615 397 110 0 |
| DRIVE 9X12 FLARED END 19 MM | 615 936 187 0 | 615 397 111 0 |
| DRIVE 9X12 FLARED END 21 MM | 615 936 188 0 | 615 397 112 0 |
| DRIVE 9X12 FLARED END 22 MM | 615 936 189 0 | 615 397 113 0 |
| DRIVE 9X12 FLARED END 24 MM | 615 936 190 0 | 615 397 114 0 |



| RING BOX END - METRIC | TAG | NO TAG |
|--------------------------------|---------------|---------------|
| DRIVE 9X12 RING BOX END 7 MM | 615 936 165 0 | 615 397 078 0 |
| DRIVE 9X12 RING BOX END 8 MM | 615 936 166 0 | 615 397 079 0 |
| DRIVE 9X12 RING BOX END 10 MM | 615 936 167 0 | 615 397 080 0 |
| DRIVE 9X12 RING BOX END 11 MM | 615 936 168 0 | 615 397 081 0 |
| DRIVE 9X12 RING BOX END 12 MM | 615 936 169 0 | 615 397 082 0 |
| DRIVE 9X12 RING BOX END 13 MM | 615 936 170 0 | 615 397 083 0 |
| DRIVE 9X12 RING BOX END 14 MM | 615 936 171 0 | 615 397 084 0 |
| DRIVE 9X12 RING BOX END 15 MM | 615 936 172 0 | 615 397 085 0 |
| DRIVE 9X12 RING BOX END 16 MM | 615 936 173 0 | 615 397 086 0 |
| DRIVE 9X12 RING BOX END 17 MM | 615 936 174 0 | 615 397 087 0 |
| DRIVE 9X12 RING BOX END 18 MM | 615 936 175 0 | 615 397 088 0 |
| DRIVE 9X12 RING BOX END 19 MM | 615 936 176 0 | 615 397 089 0 |
| DRIVE 9X12 RING BOX END 21 MM | 615 936 177 0 | 615 397 090 0 |
| DRIVE 9X12 RING BOX END 22 MM | 615 936 178 0 | 615 397 091 0 |
| DRIVE 14X18 RING BOX END 13 MM | 615 936 208 0 | 615 397 173 0 |
| DRIVE 14X18 RING BOX END 14 MM | 615 936 209 0 | 615 397 174 0 |
| DRIVE 14X18 RING BOX END 15 MM | 615 936 210 0 | 615 397 175 0 |
| DRIVE 14X18 RING BOX END 16 MM | 615 936 211 0 | 615 397 176 0 |
| DRIVE 14X18 RING BOX END 17 MM | 615 936 212 0 | 615 397 177 0 |
| DRIVE 14X18 RING BOX END 18 MM | 615 936 213 0 | 615 397 178 0 |
| DRIVE 14X18 RING BOX END 19 MM | 615 936 214 0 | 615 397 179 0 |
| DRIVE 14X18 RING BOX END 21 MM | 615 936 215 0 | 615 397 180 0 |
| DRIVE 14X18 RING BOX END 22 MM | 615 936 216 0 | 615 397 181 0 |
| DRIVE 14X18 RING BOX END 24 MM | 615 936 217 0 | 615 397 182 0 |
| DRIVE 14X18 RING BOX END 27 MM | 615 936 218 0 | 615 397 183 0 |
| DRIVE 14X18 RING BOX END 30 MM | 615 936 219 0 | 615 397 184 0 |
| DRIVE 14X18 RING BOX END 32 MM | 615 936 220 0 | 615 397 185 0 |
| DRIVE 14X18 RING BOX END 34 MM | 615 936 221 0 | 615 397 186 0 |
| DRIVE 14X18 RING BOX END 36 MM | 615 936 222 0 | 615 397 187 0 |
| DRIVE 14X18 RING BOX END 41 MM | 615 936 223 0 | 615 397 188 0 |



| BLANK END | TAG | NO TAG |
|-----------------------|---------------|---------------|
| DRIVE 9X12 BLANK END | 615 936 228 0 | 615 397 130 0 |
| DRIVE 14X18 BLANK END | 615 936 226 0 | 615 397 203 0 |
| DRIVE 21X26 BLANK END | 615 936 444 0 | 615 936 443 0 |

DIGITAL WRENCH ACCESSORIES

END FITTINGS WITH EMBEDDED RFID TAG* AND NO TAG



| OPEN END - INCHES | TAG | NO TAG |
|-----------------------------|---------------|---------------|
| DRIVE 9X12 OPEN END 1/4" | 615 936 229 0 | 615 397 069 0 |
| DRIVE 9X12 OPEN END 5/16" | 615 936 230 0 | 615 397 070 0 |
| DRIVE 9X12 OPEN END 3/8" | 615 936 231 0 | 615 397 071 0 |
| DRIVE 9X12 OPEN END 7/16" | 615 936 232 0 | 615 397 072 0 |
| DRIVE 9X12 OPEN END 1/2" | 615 936 233 0 | 615 397 073 0 |
| DRIVE 9X12 OPEN END 9/16" | 615 936 234 0 | 615 397 074 0 |
| DRIVE 9X12 OPEN END 5/8" | 615 936 235 0 | 615 397 075 0 |
| DRIVE 9X12 OPEN END 11/16" | 615 936 236 0 | 615 397 076 0 |
| DRIVE 9X12 OPEN END 3/4" | 615 936 237 0 | 615 397 077 0 |
| DRIVE 14X18 OPEN END 7/16" | 615 221 008 0 | 615 397 145 0 |
| DRIVE 14X18 OPEN END 1/2" | 615 221 009 0 | 615 397 146 0 |
| DRIVE 14X18 OPEN END 9/16" | 615 221 010 0 | 615 397 147 0 |
| DRIVE 14X18 OPEN END 5/8" | 615 221 011 0 | 615 397 148 0 |
| DRIVE 14X18 OPEN END 11/16" | 615 221 012 0 | 615 397 149 0 |
| DRIVE 14X18 OPEN END 3/4" | 615 221 013 0 | 615 397 150 0 |
| DRIVE 14X18 OPEN END 13/16" | 615 221 014 0 | 615 397 151 0 |
| DRIVE 14X18 OPEN END 7/8" | 615 221 015 0 | 615 397 152 0 |
| DRIVE 14X18 OPEN END 15/16" | 615 221 016 0 | 615 397 153 0 |
| DRIVE 14X18 OPEN END 1" | 615 221 017 0 | 615 397 154 0 |
| DRIVE 14X18 OPEN END 1,1/8" | 615 221 018 0 | 615 397 172 0 |



| FLARED END - INCHES | TAG | NO TAG |
|-----------------------------|---------------|---------------|
| DRIVE 9X12 FLARED END 3/8" | 615 221 001 0 | 615 397 115 0 |
| DRIVE 9X12 FLARED END 7/16" | 615 221 002 0 | 615 397 116 0 |
| DRIVE 9X12 FLARED END 1/2" | 615 221 00 | |

More Than Productivity